

Condensate removal pumps

Air conditioning - Refrigeration - Heating





Factory (Madagascar)



Headquarter (France)



Factory (China)

FEW WORDS ABOUT SICCOM

SICCOM S.A.S was founded in 1979 and specialises in condensate removal pumps, level and proximity sensors, bimetal heat protection, and interference suppressors for car industry.

SICCOM's expertise means customers can benefit from a range of high added-value products that meet installers' requirements.

SICCOM technology is designed and implemented by its own engineering department, made up of a number of highly qualified engineers and technicians.

SICCOM constantly strives to innovate and now enjoys world-wide success in more than 50 countries

As it has grown, it has opened factories in Madagascar and China, and subsidiaries in Milan, Barcelona and New Delhi alongside its head office in the Paris area.

This international presence means it is able to supply customers regardless of any particular geopolitical situation.

Eco-design

Fully aware that the virtuous eco-design cycle is beneficial to everyone, SICCOM has chosen to fully integrate this approach into its various production phases.

The mini FLOWATCH® 2, the brand's star product, has been the first product illustrating this approach. The environmental impact has been reduced from 5 to 20%, and the life has been multiplied by 2. More recently, the mini FLOWATCH® 0 reached 65.6% of environmental impact reduction for its use phase!

Our approach:

*"Significant environmental improvements,
better service for our customers."*

Certifications

All our sites have received ISO 9001 version 2015 certification.

Quality procedures encompass all of the company's services, ensuring optimal quality levels.



SICCOM products are available in more than 50 countries.

CONTENTS

PREMIUM RANGE

ECO RANGE

DUO RANGE

	 Air conditioning	 Refrigeration	 Heating	Flowrate max	Discharge head max	Page
mini FLOWATCH® 2				15 l/h	10 m	5
mini FLOWATCH® 2 Silence				15 l/h	10 m	6
FLOWATCH® DESIGN				15 l/h	10 m	7
mini FLOWATCH® 3 WiFi				15 l/h	10 m	8
mini FLOWATCH® 3 WiFi DESIGN				15 l/h	10 m	9
FLOWATCH® VISION				15 l/h	10 m	10
SUNNY FLOWATCH® CLIM				15 l/h	10 m	11
FLOWATCH® TANK				788 l/h	5.5 m	12
Centrifugal pump CP08				60 l/h	110 cm	13
mini FLOWATCH® 0 <small>50Hz only</small>				10 l/h	10 m	15
ECO FLOWATCH®				13.2 l/h	10 m	16
ECO FLOWATCH® DESIGN				13.2 l/h	10 m	17
ECO LINE				13.2 l/h	10 m	18
MAXI ECO FLOWATCH®				40 l/h	10 m	19
FlowIta +				13.2 l/h	10 m	20
ECOTANK+ 1.2 / ECOTANK+ 2.5				300 l/h (50Hz) 400 l/h (60Hz)	4.6 m (50Hz) 6 m (60Hz)	21
mini FLOWATCH® 2 DUO				19 l/h	10 m	23
FLOWATCH® VISION DUO				19 l/h	10 m	24
SUNNY FLOWATCH® DUO				19 l/h	10 m	25
Pump accessories						26
Level and proximity Sensors						27

PREMIUM RANGE

ECO RANGE

DUO RANGE



PREMIUM RANGE

Premium range is composed by high quality condensate pumps.

They are all equipped with an integrated alarm (except CP08) and include the entire technological expertise of SICCOM. Reliable, long lasting, silent and efficient, these pumps will perfectly answer to the installer's and final user's expectations.

	Application			Compatible appliance						Specifications			Type of installation				
	Air conditioning	Refrigeration	Heating	Wall-mounted air conditioner	Floor-mounted air conditioner	Ductable	Cassette	Refrigerated equipment	Gas condensing boiler	Flowrate (l/h)	Discharge head (m)	Noise level (dBA)	Inside the unit	Wall-mounted against the unit	Remotely	Inside a duct	Floor-mounted
mini FLOWATCH® 2	X			X	X	X				15	10	20,2	X		X	X	
mini FLOWATCH® 2 Silence	X			X	X	X				15	10	19,7	X		X	X	
FLOWATCH® DESIGN	X			X						15	10	20,2				X	
mini FLOWATCH® 3 WiFi	X			X	X	X				15	10	20,2	X		X	X	
mini FLOWATCH® 3 WiFi DESIGN	X			X						15	10	20,2				X	
FLOWATCH® VISION	X			X						15	10	19,7		X			
SUNNY FLOWATCH® CLIM	X	X		X	X	X	X	X		15	10	20,2			X		X
FLOWATCH® TANK	X	X	X	X	X	X	X	X	X	788	5,5	47			X		X
Centrifugal pump CP08	X						X			60	1.1	26	X				

mini FLOWATCH® 2

mini FLOWATCH® 2 Silence

FLOWATCH® DESIGN

mini FLOWATCH® 3 WiFi

mini FLOWATCH® 3 WiFi DESIGN



FLOWATCH® VISION

SUNNY FLOWATCH® CLIM

FLOWATCH® TANK



Centrifugal pump CP08



mini FLOWATCH® 2

Mini solenoid pump reliable and silent for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LC4400

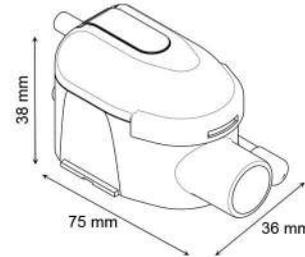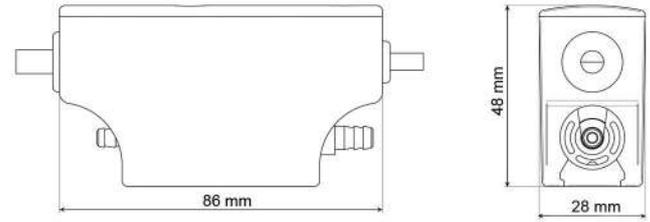


Hose diameters
Suction - 4/6mm - Supplied
Discharge - 6/9 mm - Not supplied

Specifications

Flowrate max	15 l/h
Suction head max	2 m
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC 5A
Noise level	20.2 dBA
Protection rating	IP64
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable length	1.6 m
Dimensions	86 x 28 x 48 mm / 75 x 38 x 36 mm

* The pump is able to run 100% of the time if necessary.

Flowrate

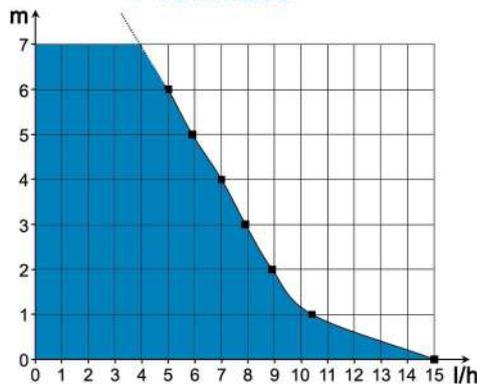

Recommended accessory



Kit Silence

Reduces the noise level (19,7 dBA) and makes the installation easier.

Ref: GC1KFX2010

Benefits



20.2 dBA

Very silent pump, suitable for an installation in any room.



IP64 protection rating

Protected from water and dust ingress.




Quick connectors Plug & Play

Makes installation and maintenance easier.



Clear reservoir

Makes the maintenance easier thanks to an easy viewing of the reservoir state.



Brass outlet

More solid and reliable than plastic outlet.



Accessories included

All necessary accessories are included in the box.

Pack contents






Pump - Reservoir with air-vent tube - Power / alarm cable - Reservoir stand - Double-side adhesive - Inlet tube - Suction tube 1.8m - 1 clamp

mini FLOWATCH® 2 Silence

Mini solenoid pump reliable and very silent for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCC280

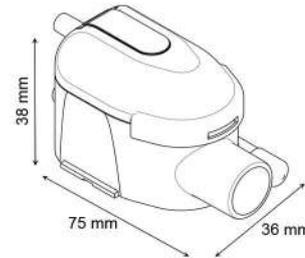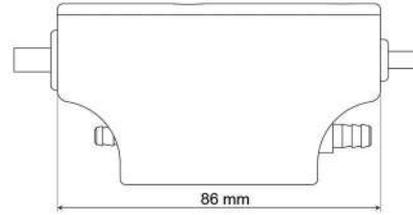


Hose diameters
Suction - 4/6mm - Supplied
Discharge - 6/9 mm - Not supplied

Specifications

Flowrate max	15 l/h
Suction head max	2 m
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC 5A
Noise level	19.7 dBA
Protection rating	IP64
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable lenght	1.6 m
Dimensions	86 x 28 x 48 mm / 75 x 38 x 36 mm

* The pump is able to run 100% of the time if necessary.

Flowrate

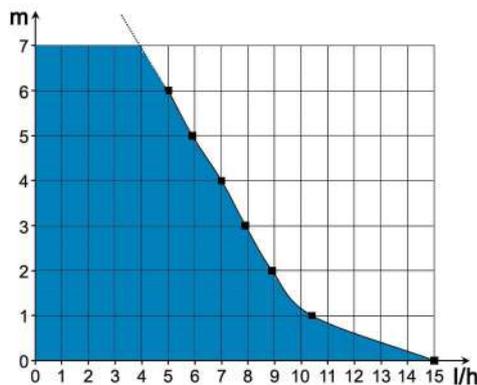

Benefits



19.7 dBA

Extremely silent pump, suitable for an installation in any room.



Pump stand

Makes the installation easier, and allows to reduce the pump vibrations.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.



IP64 protection rating

Protected from water and dust ingress.



Quick connectors Plug & Play

Makes installation and maintenance easier.



Clear reservoir

Makes the maintenance easier thanks to an easy viewing of the reservoir state.



Brass outlet

More solid and reliable than plastic outlet.

Pack contents





Pump - Reservoir with air-vent tube - Power / alarm cable - Pump stand - Reservoir stand - Double-side adhesive - Inlet tube - Suction tube 1.8m - 1 clamp

FLOWATCH® DESIGN

Complete kit, in-duct pump, for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LC9460

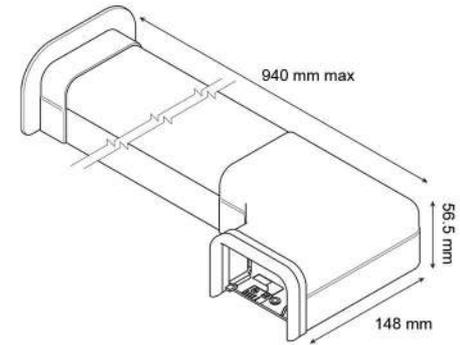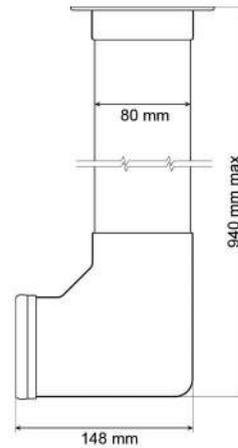

Hose diameters
Suction - 4/6 mm - Supplied
Discharge - 6/9 mm - Not supplied




Specifications

Flowrate max	15 l/h
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC 5A
Noise level	20.2 dBA
Protection rating	IP64
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable lenght	1.6 m
Dimensions	80 x 55 x 800 mm

* The pump is able to run 100% of the time if necessary.

Flowrate

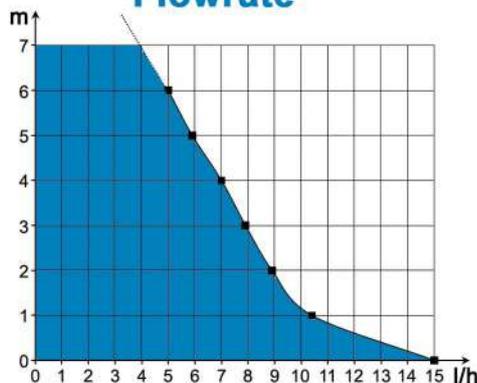

Recommended accessory



Extension cable + suction tube

Connection extension kit

Allows the pump to be moved into a false ceiling, thus reducing the noise level.

Ref: GC1KCTC710

Benefits



mini FLOWATCH® 2 included

It assures a high reliability and an easy maintenance.



20.2 dBA

Very silent pump, suitable for an installation in any room.



IP64 protection rating

Protected from water and dust ingress.



Stop siphoning included

Allows to avoid all risk of negative discharge and to secure the pump functioning over time.



Nice design

Thanks to its shape and its finishing accessories (included), FLOWATCH® DESIGN offers great aesthetics qualities.



Kit pre-assembled

Pump is already installed in its duct. Installation is easy and quick.

Pack contents



Duct with elbow- Finishing gasket - Finishing ceiling plate - Pump in absorber bracket - Reservoir with air-vent tube - Power / alarm cable - Reservoir stand - Inlet tube - Suction tube 0.25m - Screws and rawplugs

mini FLOWATCH® 3 WiFi

As a real product of predictive maintenance, the mini FLOWATCH® 3 allows to remotely supervise a fleet of pumps and to anticipate a maintenance on a pump or an air conditioner. For air conditioners up to 10kW / 36000BTU.

Ref: DE05WFCC960



Hose diameters
Suction - 4/6mm - Supplied
Discharge - 6/9 mm - Not supplied

The first
condensate pump
WiFi connected



Monitor your **pump fleet** in the blink of an eye!



View all pump datas




The pump sends you an email when an alarm goes off!



Specifications

Flowrate max	15 l/h
Suction head max	2 m
Discharge head max	10 m
Electrical power	21W
Voltage	220-240V 50/60Hz
Alarm	NC 5A
Noise level	20.2 dBA
Protection rating	IPX4
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable lenght	1.6 m
Dimensions	272 x 35 x 43 mm / 75 x 38 x 36 mm

* The pump is able to run 100% of the time if necessary.

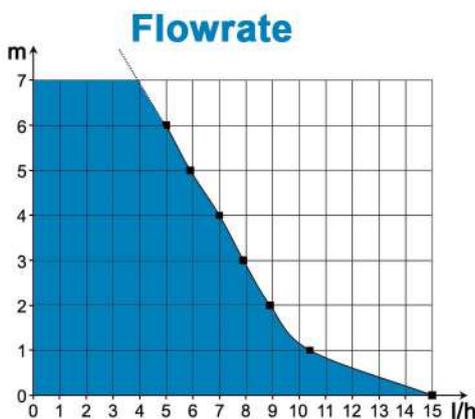

Benefits



Web Interface

The interface is accessible from a computer, smartphone, or tablet and requires no software or application installation.




Email sending in case of alarm

Be notified immediately in the event of a malfunction (3 alarm cases).



Real-time supervision

Access a wealth of information about your pump fleet in just a few clicks.



Pump interconnection

Create a network of pumps, and allow them to communicate with each other for more productive management of your pump fleet.



20.2 dBA

Very quiet pump, suitable for installation in any room.



Stop siphoning included

Allows to avoid all risk of negative discharge.

Pack contents

Pump - Reservoir with air-vent tube - Reservoir stand - Double-side adhesive - Inlet tube - Suction tube 1.8m - Clamps

WiFi connected pump in duct version, ready to install, for the condensate removal from air conditioners up to 10kW / 36000BTU.

Ref: DE05WFCD960



All the benefits of the
mini FLOWATCH 3 WiFi
in duct version!



Benefits



Email sending in case of alarm

Be notified immediately in the event of a malfunction (3 alarm cases).



Real-time supervision

Access a wealth of information about your pump fleet in just a few clicks.



Web interface

The interface is accessible from a computer, smartphone, or tablet and requires no software or application installation.



Pump interconnection

Create a network of pumps, and allow them to communicate with each other for more productive management of your pump fleet.



20.2 dBA

Very quiet pump, suitable for installation in any room.



Stop siphoning included


Allows to avoid all risk of negative discharge and to secure the pump functioning over time.

Specifications

Flowrate max	15 l/h
Discharge head max	10 m
Electrical power	21W
Voltage	220-240V 50/60Hz
Alarm	NC 5A
Noise level	20.2 dBA
Protection rating	IPX4
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable length	1.6 m
Dimensions	80 x 55 x 800 mm

* The pump is able to run 100% of the time if necessary.

Flowrate

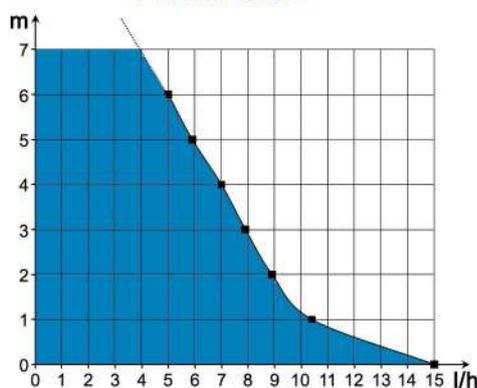

Kit pre-assembled

Pump is already installed in its duct. Installation is easy and quick.

Pack contents





Duct with elbow- Finishing gasket - Finishing ceiling plate - Pump - Reservoir with air-vent tube - Inlet tube - Suction tube 0.25m - Screws and rawplugs

FLOWATCH® VISION

The only monoblock wall pump of the market, installed horizontally or vertically, for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCB900

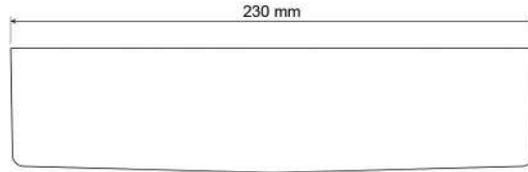

Hose diameter

Discharge - 6/9 mm - Not supplied



Benefits

4 possible installations



World premiere - Can be installed horizontally or vertically, on the right or on the left of the air conditioner.

Easy maintenance



Access to the pump elements (reservoir, tubes etc.) is made by removing the cover.

Specifications

Flowrate max	15 l/h
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC 5A
Noise level	19.7 dBA
Protection rating	IPX3
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable lenght	1.4 m
Dimensions	230 x 61.5 x 55 mm

* The pump is able to run 100% of the time if necessary.



19.7 dBA


Extremely silent pump, suitable for an installation in any room.

Record size



Thanks to its small size, the FLOWATCH® VISION is the most discreet and aesthetic monoblock wall pump of the market.

Flowrate

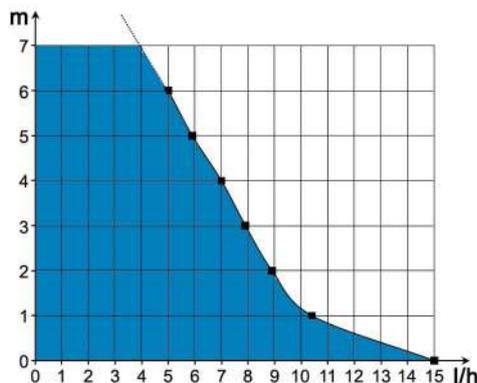

Reservoir with removing filter

Prevents dust and particles to damage the pump. Easy to clean.

Pack contents





Pump - Reservoir for horizontal installation
- Reservoir for vertical installation - Inlet tube - Screws and rawlplugs - 1 clamp

SUNNY FLOWWATCH® CLIM

Mini tank pump (solenoid) for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05RCC060

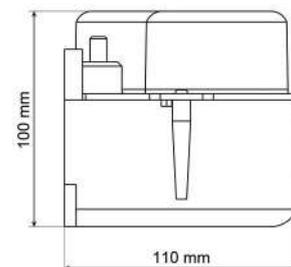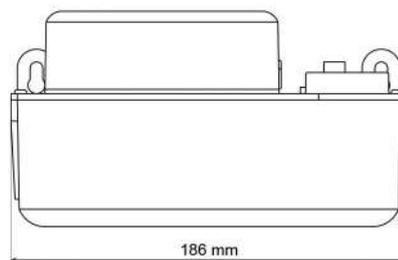

Hose diameter

Discharge - 6/9 mm - Not supplied



Specifications

Flowrate max	15 l/h
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC 5A
Noise level	20.2 dBA
Protection rating	IPX4
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable length	1.5m / 1.3m
Dimensions	186 x 110 x 100 mm

* The pump is able to run 100% of the time if necessary.

Benefits



20.2 dBA

Very silent pump, suitable for an installation in any room.



Compact tank pump

The SUNNY FLOWWATCH® CLIM offers the best tank capacity/pump size of the market.



IPX4 protection rating

Protected from water splashes.



Removable integrated filter

Prevent dust and particles to damage the pump. Easy to remove and to clean.



Mounting brackets


Thanks to its mounting brackets (and screws and rawplugs supplied), pump can be easily fixed to the wall.



Inlet adapter included

This adapter allows condensate to enter the pump via tubes of different diameters.

Flowrate

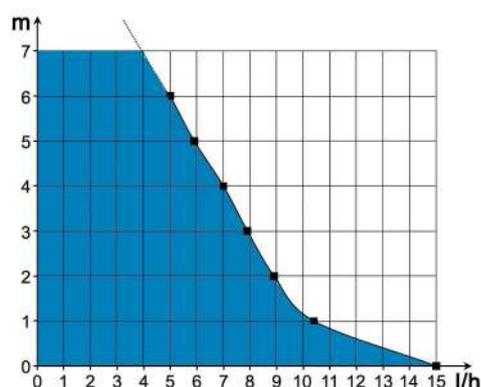


Pack contents

Pump - Inlet tube - Screws and rawplugs

FLOWATCH® TANK

Centrifugal pump high efficiency for the removal of acid and charged condensates of gas condensing boilers.

Ref. DE13QCA700

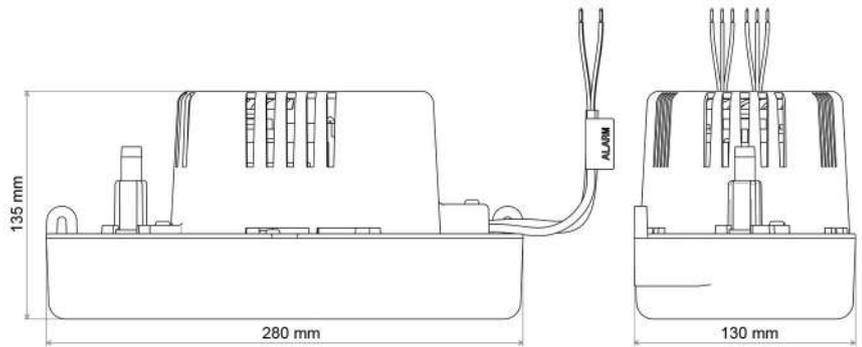

pH > 2.5

Hose diameter
Discharge - 9/12 mm or 6/9 mm - Not supplied



Benefits



High efficiency
Flowrate 788 l/h
Discharge head 5.5 m



Reversible tank
Allows the FLOWATCH® TANK to be installed in any configuration.



Removable check valve
The check valve supplied can be removed easily (1/4 turn) to be cleaned.



2 possible outlet diameters
Original outlet for 9/12mm tube
+ reducer for 6/9mm tube




Condensate inlet reducer
Guarantees an easy connection to the boiler.

Specifications

Flowrate max	788 l/h
Discharge head max	5.5 m
pH tolerated	pH > 2.5
Max temperature of condensates	60°C
Electrical power	80W
Voltage	220-240V 50/60Hz
Alarm	NO-NC 3A
Noise level	47 dBA
Protection rating	IP20
Thermal protection	Yes
Operating cycle*	30%
Power / alarm cable lenght	2m / 1m
Dimensions	280 x 130 x 135 mm

* The pump is able to run 30% of the time if necessary. (ex 3s ON / 7s OFF)

Flowrate

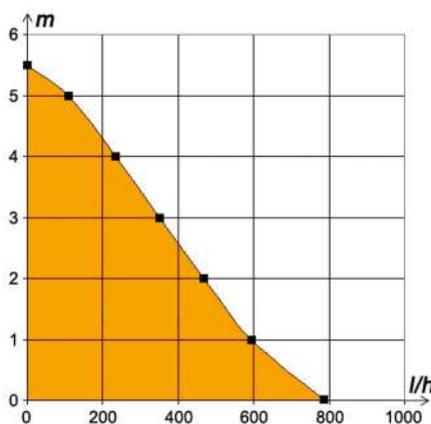

Pack contents

Pump with check valve, 3 taps - Inlet adaptor - 6/9mm outlet adaptor - Screws and rawplugs

€CO RANGE

ECO range has been created by SICCOM in 2014 in order to propose entry-level pumps at prices even more attractive. Building on the Premium range expertise, SICCOM has developed a range of simple, reliable and easy-to-install pumps.

		Application			Compatible appliance						Specifications			Type of installation				
		Air conditioning	Refrigeration	Heating	Wall-mounted air conditioner	Floor-mounted air conditioner	Ductable	Cassette	Refrigerated equipment	Gas condensing boiler	Flowrate (l/h)	Discharge head (m)	Noise level (dBA)	Inside the unit	Wall-mounted against the unit	Remotely	Inside a duct	Floor-mounted
mini FLOWATCH® 0	50Hz only	X			X	X	X				10	10	-	X		X	X	
ECO FLOWATCH®		X			X	X	X				13,2	10	-	X		X	X	
ECO FLOWATCH® DESIGN		X			X	X	X				13,2	10	-				X	
ECO LINE		X			X	X	X				13,2	10	-	X		X	X	
MAXI ECO FLOWATCH®		X			X	X	X				40	10	-	X		X	X	
FlowIta+		X			X						13,2	10	-		X			
ECOTANK+ 1.2	50Hz only	X	X	X	X	X	X	X	X	300	4,6	-			X		X	
ECOTANK+ 2.5	50Hz only	X	X	X	X	X	X	X	X	300	4,6	-			X		X	
ECOTANK+ 2.5	60Hz only	X	X	X	X	X	X	X	X	400	6	-			X		X	

mini FLOWATCH® 0



ECO FLOWATCH®



ECO FLOWATCH® DESIGN



ECO LINE



MAXI ECO FLOWATCH®



FlowIta+



ECOTANK+ 1.2







ECOTANK+ 2.5



mini FLOWATCH® 0

Mini solenoid pump simple and economic for the condensate removal of air conditioners up to 8kW / 27000BTU.

Ref: DE05LCB980

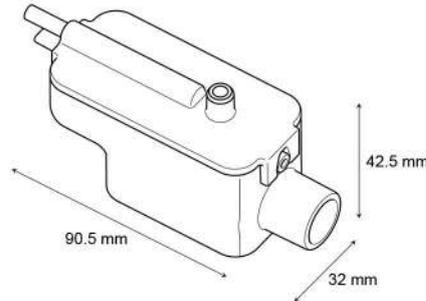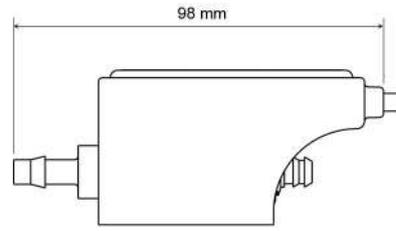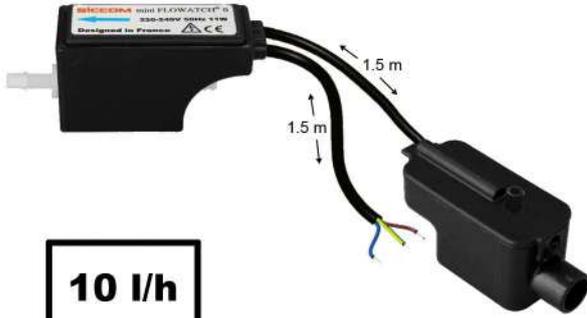

Hose diameters
Suction - 6/9 mm - Not supplied
Discharge - 6/9 mm - Not supplied

Specifications

Flowrate max	10 l/h
Suction head max	1.5 m
Discharge head max	10 m
Electrical power	11W
Voltage	220-240V 50Hz
Alarm**	No alarm
Noise level	N/C
Protection rating	IP20
Thermal protection	Yes
Operating cycle*	100%
Power cable lenght	1.5 m
Dimensions	98 x 30 x 41 mm / 90 x 32 x 42 mm

* The pump is able to run 100% of the time if necessary.

** Alarm option available on request.

Benefits



Removable reservoir

Can be easily unclipped in order to clean the reservoir and the float.



Integrated filter

Plastic filter integrated to the reservoir. It prevents big impurities to damage the pump.



Accessories included


All necessary accessories are included in the box.



Compact pump

Very small, pump and reservoir are easy to install.

Flowrate

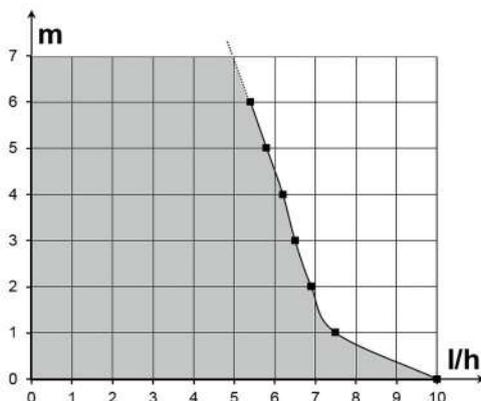

Pack contents







Pump - Reservoir - Double-side adhesive for reservoir fixing - Inlet tube - 3 clamps

ECO FLOWATCH®

Mini solenoid pump simple and economic for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCC190

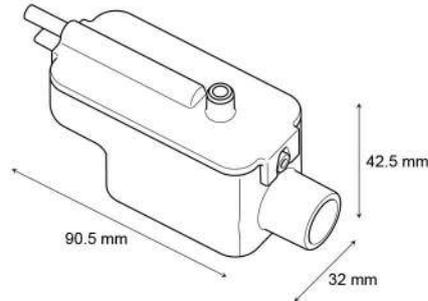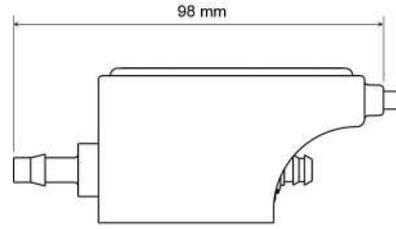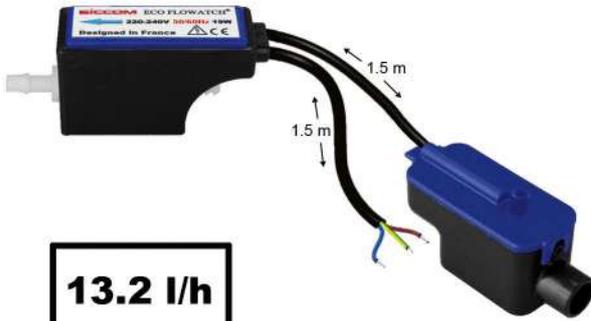

Hose diameters
Suction - 6/9 mm - Not supplied
Discharge - 6/9 mm - Not supplied

Specifications

Flowrate max	13.2 l/h
Suction head max	1.5 m
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm**	No alarm
Noise level	N/C
Protection rating	IP20
Thermal protection	Yes
Operating cycle*	100%
Power cable lenght	1.5 m
Dimensions	98 x 30 x 41 mm / 90 x 32 x 42 mm

* The pump is able to run 100% of the time if necessary.

** Alarm option available on request.

Benefits



Removable reservoir

Can be easily unclipped in order to clean the reservoir and the float.



Integrated filter

Plastic filter integrated to the reservoir. It prevents big impurities to damage the pump.



Accessories included


All necessary accessories are included in the box.



Compact pump

Very small, pump and reservoir are easy to install.

Flowrate

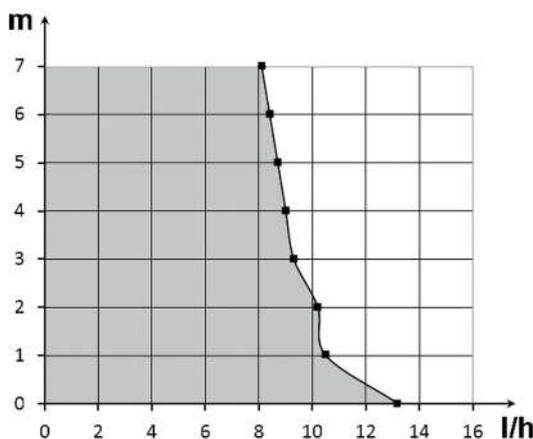

Pack contents



Pump - Reservoir - Double-side adhesive for reservoir fixing - Inlet tube - 3 clamps




ECO FLOWATCH® DESIGN

Complete kit, in-duct pump, for the condensate removal of air conditioners up to 10kW / 36000BTU.

Ref: DE05LCD320



13,2 l/h

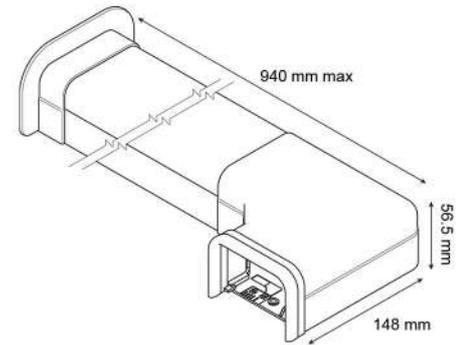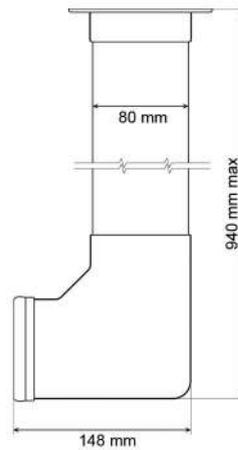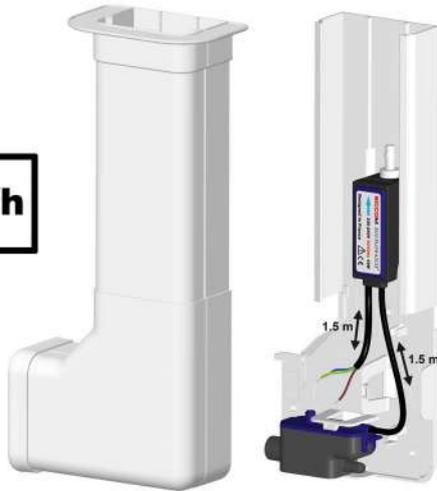

Hose diameters
Suction - 6/9 mm - Not supplied
Discharge - 6/9 mm - Not supplied



Benefits



Possibility to move the pump away

Thanks to its 1.5 m cable, the pump unit can be moved away to reduce the noise level and facilitate installation.



Removable reservoir

Can be easily unclipped in order to clean the reservoir and the float.



Integrated filter

Plastic filter integrated to the reservoir. It prevents big impurities to damage the pump.



Accessories included

All necessary accessories are included in the box.



Compact pump

Very small, pump and reservoir are easy to install.




Nice design

Thanks to its shape and its finishing accessories (included), the ECO FLOWATCH® DESIGN offers great aesthetics qualities.

Specifications

Flowrate max	13.2 l/h
Suction head max	1.5 m
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	No alarm
Noise level	N/C
Protection rating	IP20
Thermal protection	Yes
Operating cycle*	100%
Power cable lenght	1.5 m
Dimensions of the duct	80 x 55 x 800 mm

* The pump is able to run 100% of the time if necessary.

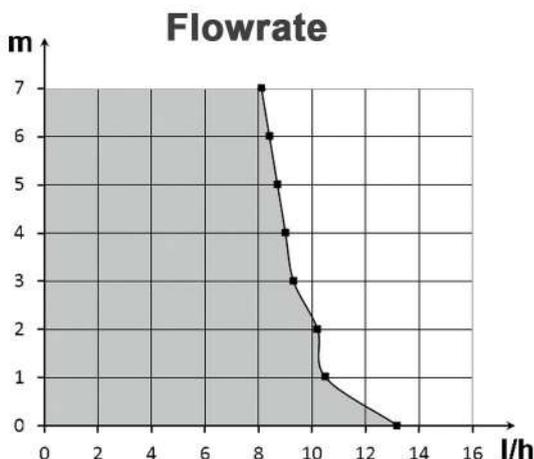

Pack contents


Duct with elbow- Finishing gasket - Finishing ceiling plate - Pump ECO FLOWATCH - Reservoir - Inlet tube - Double-side adhesive - Clamps





ECO LINE

Mini in-line pump (solenoid), ultra compact and easy to install, for the condensate removal of air conditioners up to 10KW / 36000BTU.

Ref: DE05SCC600

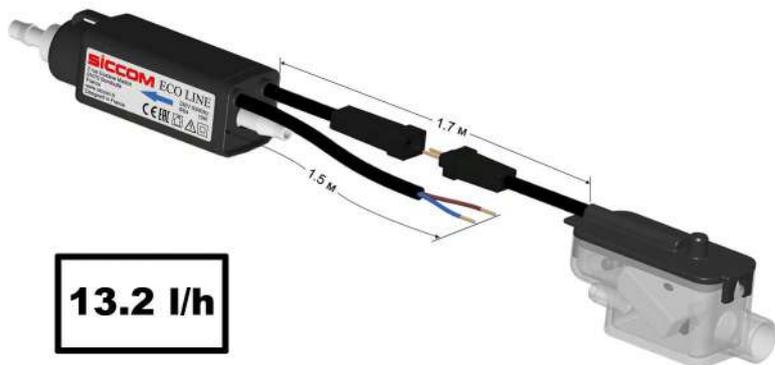

13.2 l/h

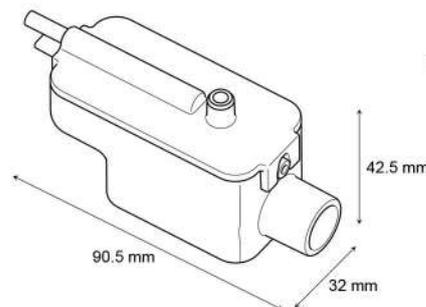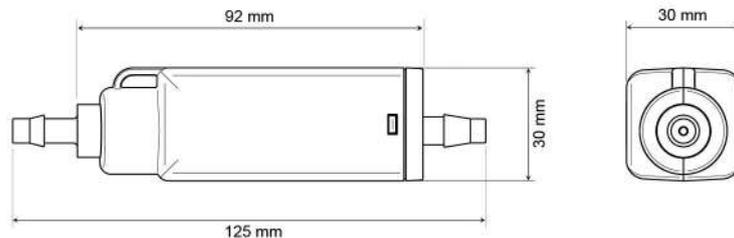

Hose diameters
Suction - 6/9 mm - Not supplied
Discharge - 6/9 mm - Not supplied


Specifications

Flowrate max	13.2 l/h
Suction head max	1.5 m
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm**	No alarm
Noise level	N/C
Protection rating	IP64
Thermal protection	Yes
Operating cycle*	100%
Power cable lenght	1.5 m
Dimensions	125 x 30 x 30 mm / 90 x 32 x 42 mm

* The pump is able to run 100% of the time if necessary.

** Alarm option available on request.

Flowrate

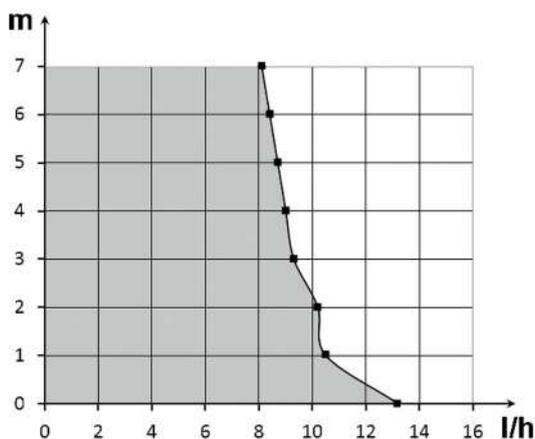

Benefits

ULTRA COMPACT pump

The most compact pump of the market!
Easy installation in a duct or inside the air conditioner.



IP64 protection rating

Protected from water and dust ingress.



Quick connectors Plug & Play

Makes installation and maintenance easier.



Removable clear reservoir

Allows a quick and easy viewing of the reservoir and the float. Easy to open and to clean.

Hanging bracket

This astucious hook allows to fix or hang the pump wherever you want (duct, false ceiling, inside de unit...).



Accessories included

All necessary accessories are included in the box.



Pack contents

Pump - Reservoir - Double-side adhesive for reservoir fixing - Inlet tube - 3 clamps






MAXI ECO FLOWATCH®

Maxi solenoid pump, compact and powerful, for the condensate removal of air conditioners up to 30kW / 100 000BTU.

Ref: DE40LCC300



40 l/h

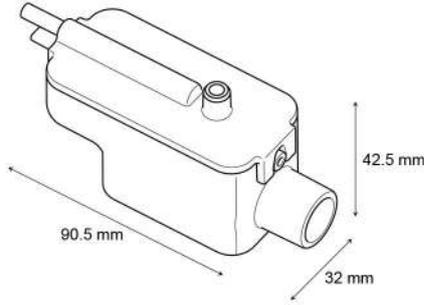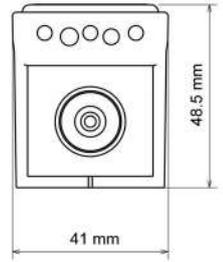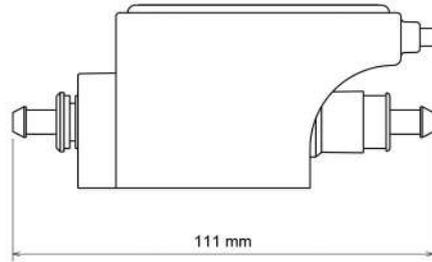

Hose diameters
Suction - 6/9 mm - Not supplied
Discharge - 6/9 mm - Not supplied


Specifications

Flowrate max	40 l/h
Suction head max	2 m
Discharge head max	10 m
Electrical power	16W
Voltage	220-240V 50/60Hz
Alarm**	No alarm
Noise level	N/C
Protection rating	IP20
Thermal protection	Yes
Operating cycle*	100%
Power cable lenght	1.5 m
Dimensions	111 x 41 x 48.5 mm / 82 x 32 x 39 mm

* The pump is able to run 100% of the time if necessary.

** Alarm option available on request.

Flowrate

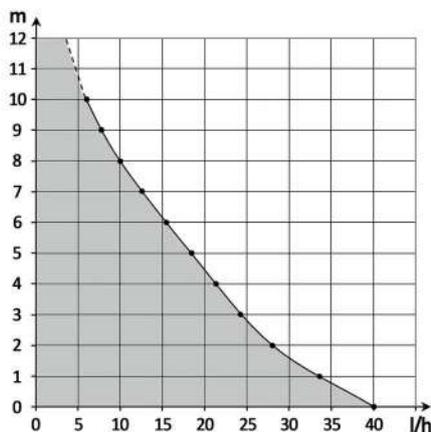

Benefits



Silent

The only pump of the world to offer such a flowrate with such a low noise.



High efficiency

Flowrate 40 l/h
Discharge head 10 m



Removable reservoir

Can be easily unclipped in order to clean the reservoir and the float.



Integrated filter

Plastic filter integrated to the reservoir. It prevents big impurities to damage the pump.



Accessories included

All necessary accessories are included in the box.




Very compact pump

Very small, pump and reservoir are easy to install.



Pack contents

Pump - Reservoir - Double-side adhesive for reservoir fixing - Inlet tube - 3 clamps

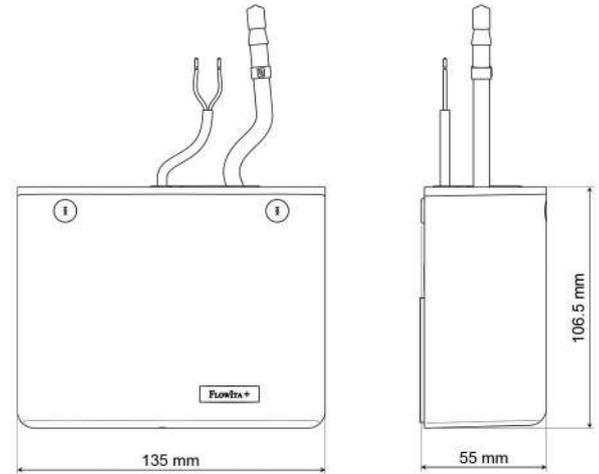


Hose diameter
Discharge - 6/9 mm - Not supplied

Specifications

Flowrate max	13.2 l/h
Discharge head max	10 m
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	No alarm
Noise level	N/C
Protection rating	IP20
Thermal protection	Yes
Operating cycle*	100%
Power cable lenght	0.8 m
Dimensions	135 x 106.5 x 55 mm

* The pump is able to run 100% of the time if necessary.

Flowrate

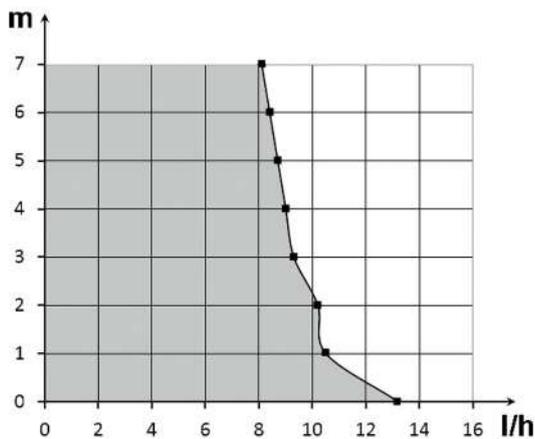

Benefits



Silent

Discreet and efficient wall-mounted pump.



Anti-vibration stand

Reduces vibrations and noise level of the pump.



185 ml

Integrated reservoir

The 185 ml reservoir allows a reduction of pump cycle number.



Accessories included

All necessary accessories are included in the box.



Quick installation

The FlowIta+ can be installed easily and quickly underneath any air conditioner.



Pack contents

Pump - Screws and rawlplugs

ECOTANK+ 1.2 / 2.5

Centrifugal tank pump for the removal of condensates from air conditioners, refrigerated displays or gas condensing boilers.

Ref ECOTANK+ 1.2 50Hz: DE12QCC610
Ref ECOTANK+ 2.5 50Hz: DE25QCC620
Ref ECOTANK+ 2.5 60Hz: DE25QCD140



pH > 2.5




Specifications

	50Hz version	60Hz version
Flowrate max	300 l/h	400 l/h
Discharge head max	4.6 m	6 m
pH tolerated	pH > 2.5	pH > 2.5
Max temperature of condensates	40°C	40°C
Electrical power	65W	65W
Voltage	230V 50Hz	230V 60Hz
Alarm	NO-NC 3A	NO-NC 3A
Noise level	N/C	N/C
Protection rating	IP24	IP24
Thermal protection	Yes	Yes
Operating cycle*	30%	30%
Power cable length	1.5 m	1.5 m
Dimensions ECOTANK+ 1.2	280 x 130 x 129 mm	
ECOTANK+ 2.5	280 x 130 x 159 mm	

* The pump is able to run 30% of the time if necessary. (ex 3s ON / 7s OFF)

Flowrate

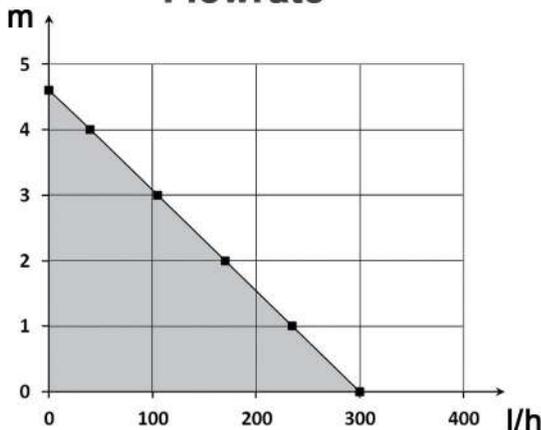

Benefits

IP24 protection

The pump is protected against water projections.



Universal electric plug

Power/alarm cable can be taken off, making easy installation and maintenance.



Outlet for 6/9 or 9/12 mm tube

Thanks to its connector supplied, the discharge can be made with a 6/9mm or a 9/12mm tube.



High capacity tank

Thanks to its 2.5 l tank, the ECOTANK+ 2.5 reduces the number of pumping cycles and answers to a great deal of applications.



Compact tank pump

With only 129mm height, the ECOTANK+ 1.2 fits easily in any space.



Reversible tank

Turning the tank allows to fit in any configuration.



180°

PVC clear tube included (only in 60Hz version)

A 6m discharge tube (10x13mm diameter) is included in the ECOTANK+ 2.5 60Hz version.



Pack contents

Pump - Cable power / alarm - 6/9mm outlet adaptor - Screws and rawplugs - PVC clear tube 6m (only in 60Hz version)



DUO RANGE

pH > 2.5

for gas condensing boilers <60 kW / 200 000 BTU

The DUO range has been especially developed for removing condensates from gas condensing boilers. SICCOM proposes innovative products in order to answer to technical and aesthetical expectations of both instaler and final user. These pumps are alternatives to centrifugal tank pumps usually used for this application, such as FLOWATCH® TANK (Premium range) and ECOTANK+ (ECO range).

	Application			Compatible appliance						Specifications			Type of installation				
	Air conditioning	Refrigeration	Heating	Wall-mounted air conditioner	Floor-mounted air conditioner	Ductable	Cassette	Refrigerated equipment	Gas condensing boiler	Flowrate (l/h)	Discharge head (m)	Noise level (dBA)	Inside the unit	Wall-mounted against the unit	Remotely	Inside a duct	Floor-mounted
mini FLOWATCH® 2 DUO	X		X	X	X	X			X	19	10	19.7	X		X	X	
FLOWATCH® VISION DUO	X		X	X					X	19	10	19.7		X			
SUNNY FLOWATCH® DUO	X	X	X	X	X			X	X	19	10	20.2			X		X

mini FLOWATCH® 2 DUO



FLOWATCH® VISION DUO



SUNNY FLOWATCH® DUO





mini FLOWATCH® 2 DUO

Mini solenoid pump reliable and silent for the condensate removal of gas condensing boilers up to 60kW / 200 000BTU.


Ref: DE05LCC500



pH > 2.5

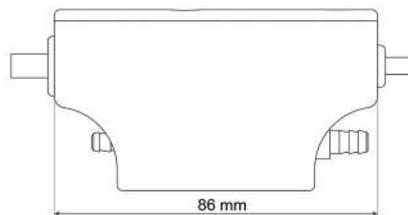

pH > 2.5

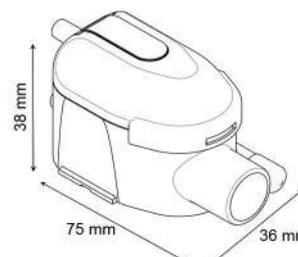

Hose diameters
Suction - 4/6mm - Supplied
Discharge - 6/9 mm - Not supplied

Benefits



19.7 dBA

Extremely silent pump, suitable for an installation in any room.



Quick connectors Plug & Play

Makes installation and maintenance easier.



Treated brass outlet

This brass outlet is specially treated to support acid condensates, and is more solid and reliable than plastic outlet.



IP64 protection rating

Protected from water and dust ingress.



Clean reservoir

Make the maintenance easier thanks to an easy viewing of the reservoir state.



Kit Silence supplied


Pump stand and reservoir stand make the installation easier and reduce the noise level.

Specifications

Flowrate max	19 l/h
Suction head max	0.5 m
Discharge head max	10 m
pH tolerated	pH > 2.5
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC 5A
Noise level	19.7 dBA
Protection rating	IP64
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable length	1.6 m
Dimensions	86 x 28 x 48 mm / 75 x 38 x 36 mm

* The pump is able to run 100% of the time if necessary.

Flowrate

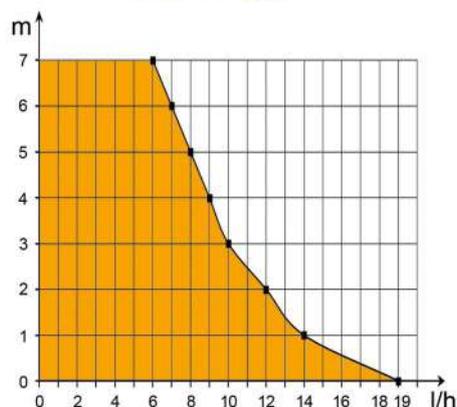

Pack contents



Pump - Reservoir with air-vent tube - Power / alarm cable - Pump stand - Reservoir stand - Double-side adhesive - Inlet tube - Suction tube 0.25m - 1 clamp

FLOWATCH® VISION DUO



SICCOM
INNOVATIVE VISION

Monoblock wall pump (solenoid), silent and innovative, for the condensate removal of gas condensing boilers up to 60kW / 200 000BTU.

Ref: DE05LCC510



pH > 2.5

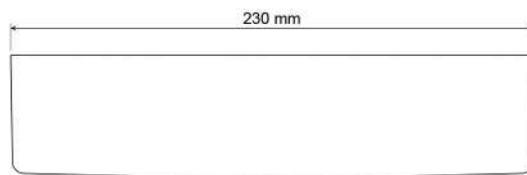

Hose diameter

Discharge - 6/9 mm - Not supplied

pH > 2.5



Benefits

4 possible installations

World premiere - Can be installed horizontally or vertically, on the right or on the left of the boiler.



19.7 dBA

Extremely silent pump, suitable for an installation in any room.



Very easy maintenance

Access to the pump elements (reservoir, tubes etc.) is made by removing the cover.

Record size

Thanks to its small size, the FLOWATCH® VISION DUO is the most discreet and aesthetic monoblock wall pump of the market.



Reservoir with removable filter


Prevent dust and particles to damage the pump. Easy to clean.

Specifications

Flowrate max	19 l/h
Discharge head max	10 m
pH tolerated	pH > 2.5
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC 5A
Noise level	19.7 dBA
Protection rating	IPX3
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable lenght	1.4 m
Dimensions	230 x 61.5 x 55 mm

* The pump is able to run 100% of the time if necessary.

Flowrate

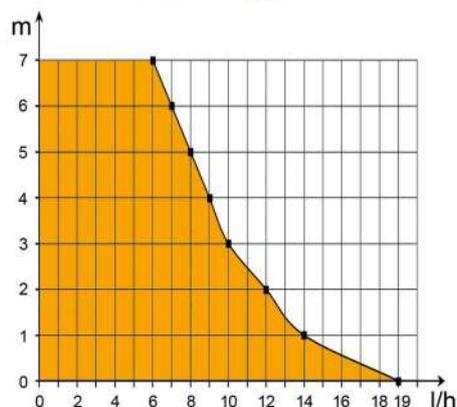

Pack contents





Pump - Inlet tube - Screws and rawplugs - 1 clamp

SUNNY FLOWATCH® DUO

Mini tank pump (solenoid) for the condensate removal of gas condensing boilers up to 60kW / 200 000BTU.

Ref. DE05NCC090

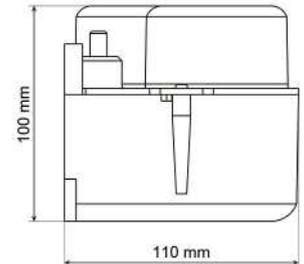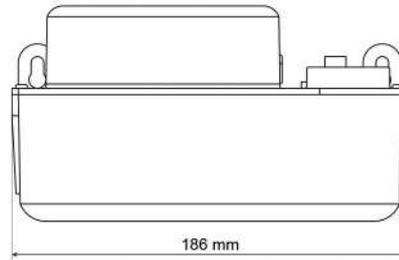

pH > 2.5

Hose diameter
Discharge - 6/9 mm - Not supplied



Benefits



20.2 dBA

Very silent pump, suitable for an installation in any room.



Compact tank pump

The SUNNY FLOWATCH® DUO offers the best tank capacity/pump size of the market.



IPX4 protection rating

Protected from water splashes.



Removable integrated filter

Prevent dust and particles to damage the pump. Easy to remove and to clean.



Mounting brackets

Thanks to its mounting brackets (and screws and rawplugs supplied), pump can be easily fixed to the wall.



Inlet adapter included


This adapter allows condensate to enter the pump via tubes of different diameters.

Specifications

Flowrate max	19 l/h
Discharge head max	10 m
pH tolerated	pH > 2.5
Electrical power	19W
Voltage	220-240V 50/60Hz
Alarm	NO-NC 5A
Noise level	20.2 dBA
Protection rating	IPX4
Thermal protection	Yes
Operating cycle*	100%
Power / alarm cable lenght	1.5m / 1.3m
Dimensions	186 x 110 x 100 mm

* The pump is able to run 100% of the time if necessary.

Flowrate

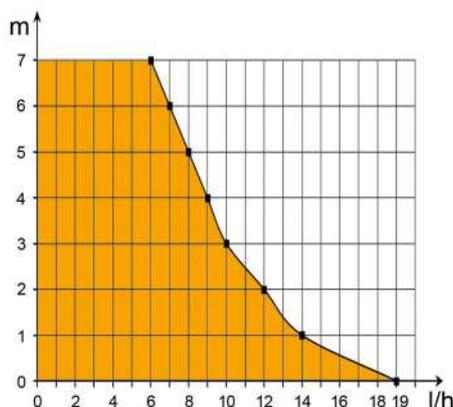

Pack contents

Pump - Inlet tube - Screws and rawplugs

Pump accessories

Discover the range of accessories for SICCOM pumps, allowing easy installation and maintenance.



Connection extension kit
(extension cable 2m + suction tube 2m)
Ref: GC1KCTC710

This kit, coupled with a FLOWATCH® DESIGN, allows to move the pump in a false ceiling, and so :

- REDUCE THE NOISE LEVEL
- FREEING UP SPACE IN THE DUCT



Reduces the noise level and facilitates the installation of mini FLOWATCH® 2

Kit Silence
Ref: GC1KFX2010



The Stop Siphoning prevents the phenomenon of negative discharge on any installation.

Stop siphoning
Ref: GC092A1001 (bag of 10)
GC092A1002 (1 piece)



Replacement reservoir for FLOWATCH® DESIGN

Short cable reservoir + air vent tube
Ref: GCDS3BTF4180



Replacement reservoir for mini FLOWATCH® 2

Long cable reservoir + air vent tube
Ref: GCDS3BTF4650



Alarm kit ECO pumps
Ref: DS1HTCC110



Bending tube Øint. 15mm
Ref: GC025D1017



Inlet adapter FLOWATCH® TANK
Ref: GC078H2008



Inlet adapter SUNNY FLOWATCH®
Ref: GC078H2007



Check valve FLOWATCH® TANK
Ref: 91A1006

Sensors

SICCOM also manufactures level and proximity sensors. Discover a part of our range below, and do not hesitate to contact us for further information.

Vertical sensors



DG series
Standard



DP series
Compact



DK series



DX series
Stainless steel



DY series
Detection by microswitches

Horizontal sensors



DHN series
Threaded fixing



DHG series
Seal compression fixing



DHM series
Nut fixing



DXN series
Stainless steel

Specific sensors



DC series
Multi-level resistive rod



DB series
Suction cane with level detector



DD series
Resistive probe



DP series
Proximity sensors

OEM series
On-demand products



Find more informations
on our website

Sensors for all your applications



and the medical, food, hydrocarbon, transportation, automotive industries...

Condensate removal pumps

SICCOM is established all across the world.
As an international manufacturer, we are committed to product quality and reliability.

Listening, communication and service are the three key values for our customer approach.

We will be delighted to provide further information, so please
CONTACT US.



France

Tel: +33 6 83 82 46 02
Email: ychaves@siccom.fr

SICCOM France - Headquarter International customer service

2, rue Gustave Madiot
ZI Les Bordes
91070 Bondoufle
Tel: +33 1 60 86 81 48
Email: commercial@siccom.fr

Northern America

Tel: +33 6 42 05 33 22
Email: pparadis@siccom.fr

Italy, Switzerland & Central Europe

Tel/Fax: +39 02 96 36 21 40
Email: cconsales@siccom.fr

India

Tel: +91 99 9900 3240
Email: djagga@siccom.fr

Spain & Latin America

Tel: +34 622 487 110
Email: tducasse@siccom.fr

Northern & Eastern Europe

Tel: +33 6 83 82 46 00
Email: pgvassort@siccom.fr

Asia

Tel: +33 6 43 31 19 27
Email: jlrendu@siccom.fr

Western Europe

Tel: +33 6 42 05 33 22
Email: pparadis@siccom.fr

Africa & Middle East

Tel: +33 6 42 05 33 22
Email: pparadis@siccom.fr

Oceania

Tel: +33 6 83 82 46 00
Email: pgvassort@siccom.fr